Parts and Diagrams

Cover Assemblies 2
Printer Labels 4
Right Hand Assemblies 6
Left Hand Assemblies 8
Scan-Axis Assemblies 10
Top Paper Path Assemblies 12
Rear Paper Path Assemblies 14
Paper Feed Assemblies 16
Cable Harnesses 18
Ink Supplies & Accessories 20
Rollfeed Components 22

Cover Assemblies

Cover Assemblies			
Reference on Drawing	**HP Part Number**	**Quantity**	**Description/Comments**
1	Q6656-60062	1	Left Cover
2	0515-2811	2	Screw
3	C7791-60286	1	Right Cover
4	0515-2812	2	Screw
5	C7790-60295	1	Filter Assembly
6	Q6656-60063	1	Back Cover (Center Cover)
7	0515-2811	6	Screw
8	C7790-60119	1	Door Sensor Assembly
9	Q6656-60064	1	Ink Cartridge Door (HP DesignJet 90)
	Q6656-60079	1	Ink Cartridge Door (HP DesignJet 90r)
10	C7790-60457	1	Printhead Door Assembly (includes Ink Cartridge Door Hinge)
11	Q6656-60065	1	Access Door Assembly
12	C7791-60216	1	Rear Trim Kit

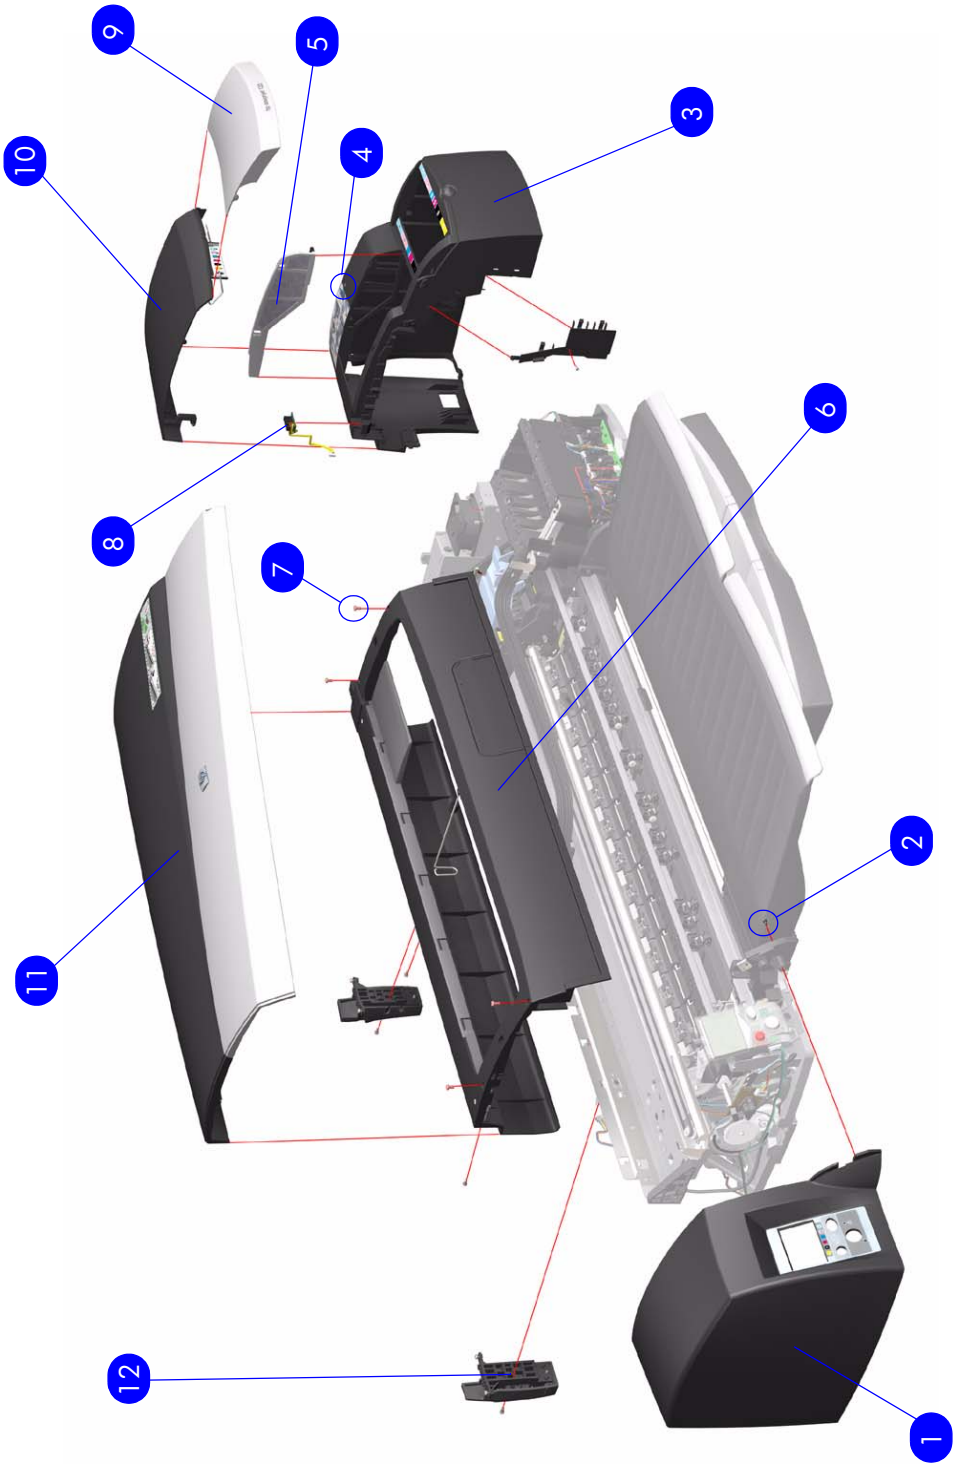

Figure 1: Cover Assemblies

Printer Labels

Printer Labels			
Reference on Drawing	**HP Part Number**	**Quantity**	**Description/Comments**
1	C7790-60450	1	Printhead Access Instructions Label
2	C7790-60449	1	Ink Cartridge Color Label
3	C7790-60201	1	Ink Cartridge Family Label
4	Q6656-60066	1	Serial Number Label Q6656A (90)
	Q6656-60080	1	Serial Number Label Q6656B (90r)
5	Q6656-60067	1	Front Panel Overlay
6	C7791-60228	1	Load Rollfeed Label

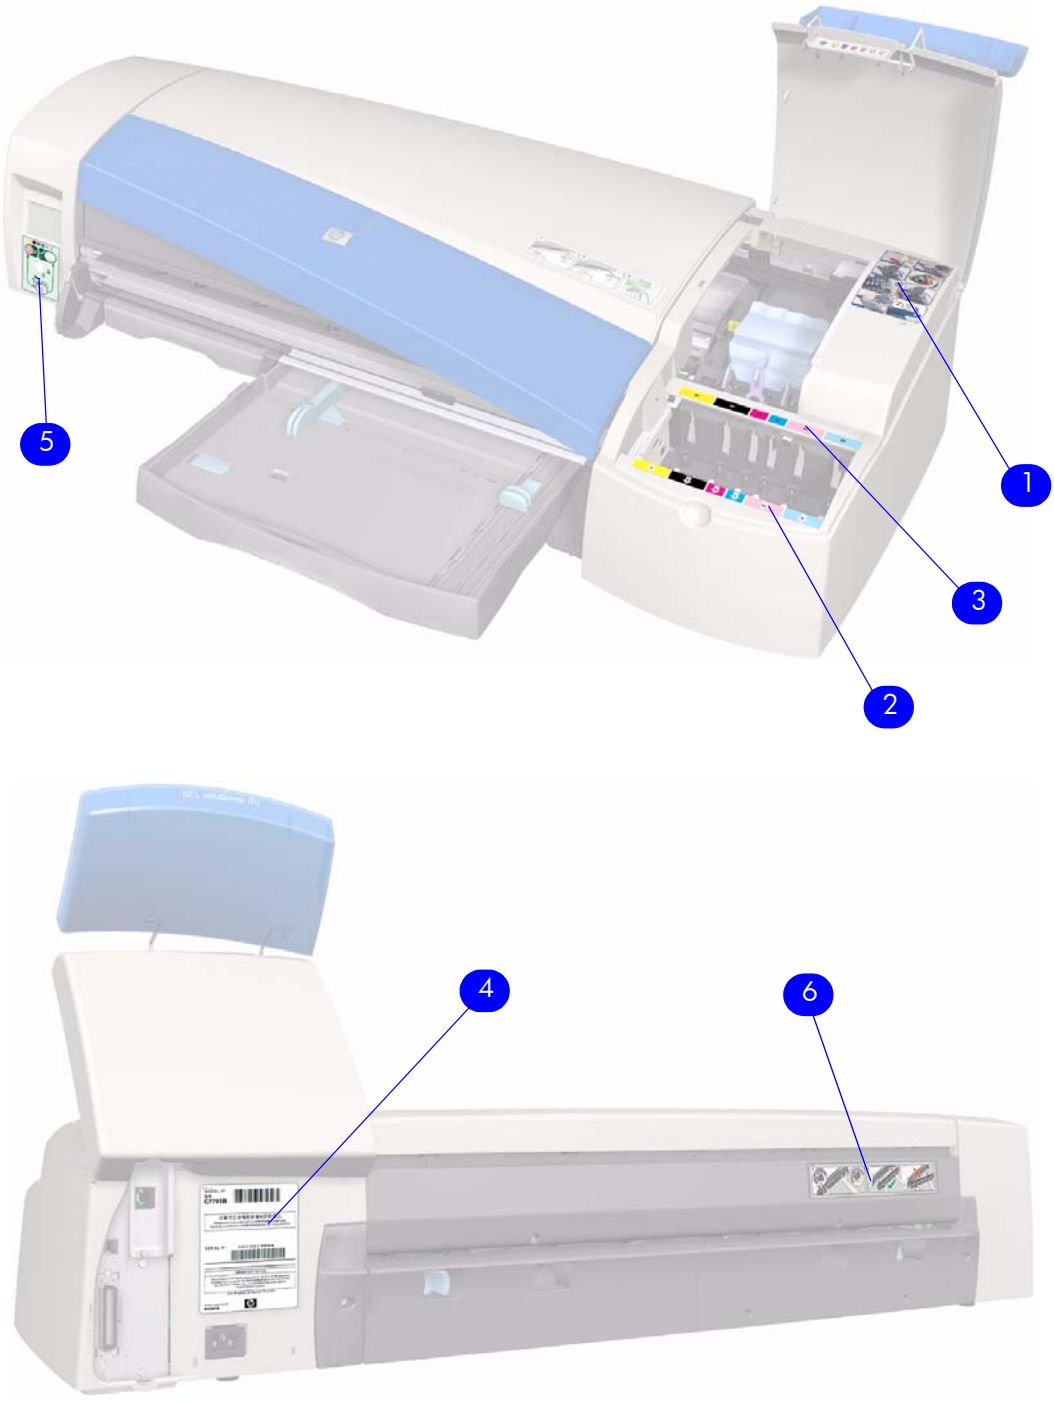

Figure 2: Printer Labels

Right Hand Assemblies

Right Hand Assemblies			
Reference on Drawing	**HP Part Number**	**Quantity**	**Description/Comments**
1	C7790-60458	1	Ink Supply Station Assembly
2	0515-2812	2	Screw
3	C7790-60145	1	ISS Bottom Foam
4	C7790-60470	1	ISS Rear Foam
5	Q6656-60068	1	Electronics Module Assembly
6	0515-2599	2	Screw
7	C7790-60091	1	Power Supply Unit
8	0515-2599	2	Screw
9	C7790-60476	1	Service Station Assembly
10	C7791-60219	1	Cleanout Interconnect PCA

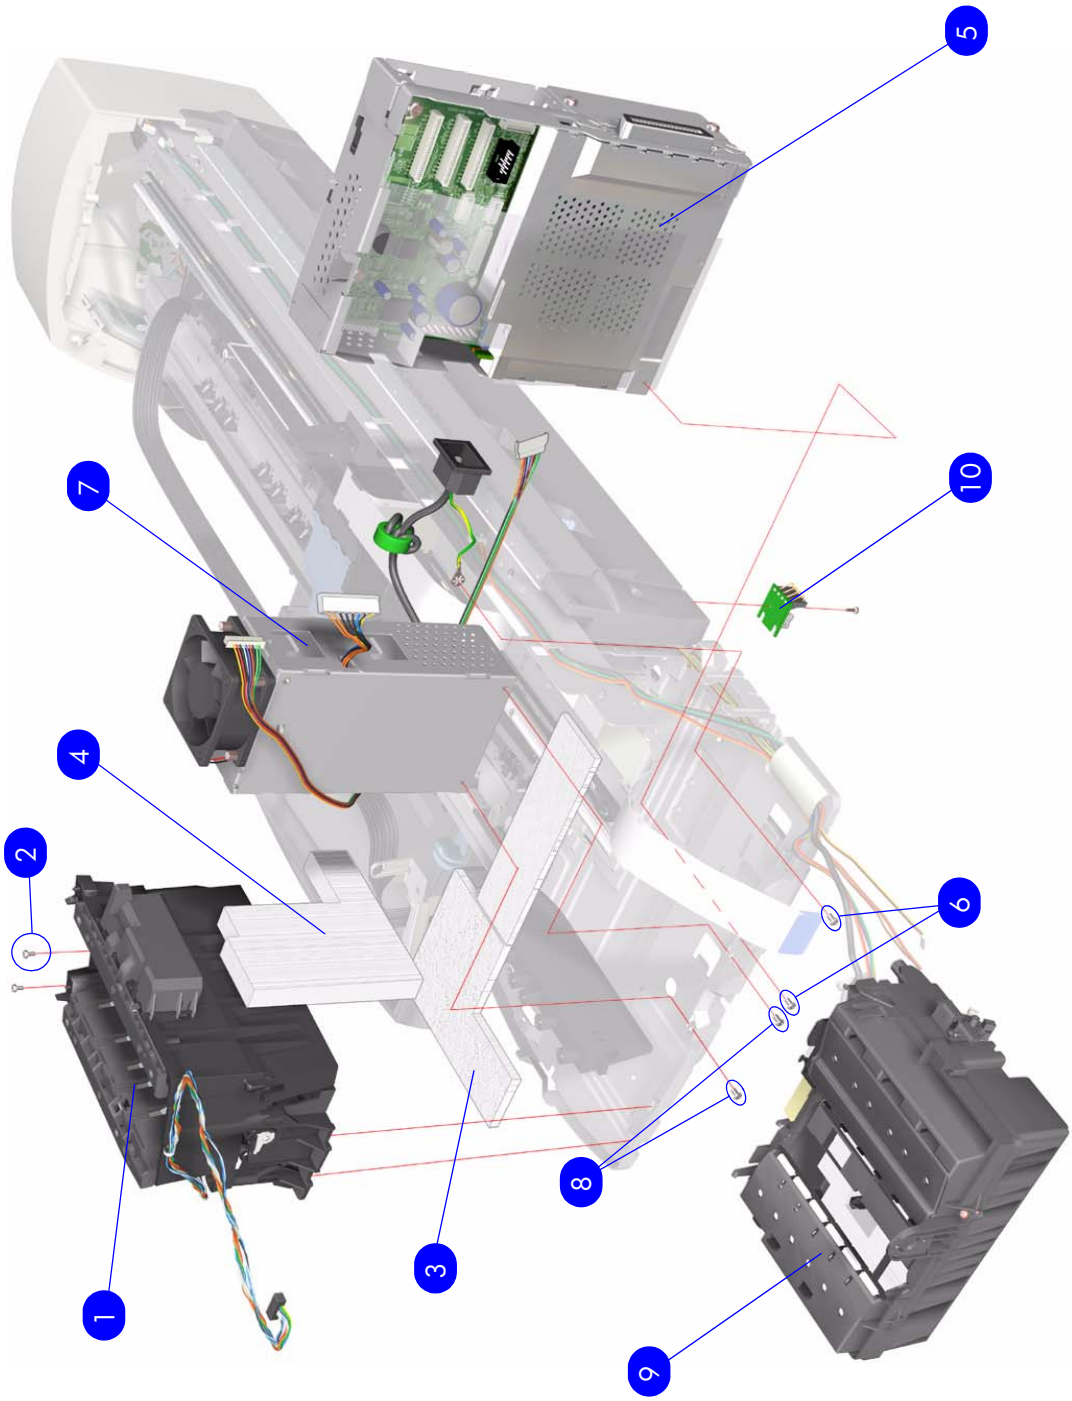

Figure 3: Right Hand Assemblies

Left Hand Assemblies

Left Hand Assemblies			
Reference on Drawing	**HP Part Number**	**Quantity**	**Description/Comments**
1	Q6656-60069	1	Front Panel Assembly
2	C8108-67038	1	LF Motor Assembly (Paper-Axis Motor)
3	C8108-67040	1	Ramp Drive Assembly
4	0515-2812	1	Screw
5	C8108-67042	1	Output Mechanism Support Assembly
6	0515-2812	2	Screw
7	C8108-67051	1	Encoder Disc
8	C7791-60143	1	Carriage Motor Assembly
9	0515-2812	2	Screw
10	C8108-67048	1	Output Belt

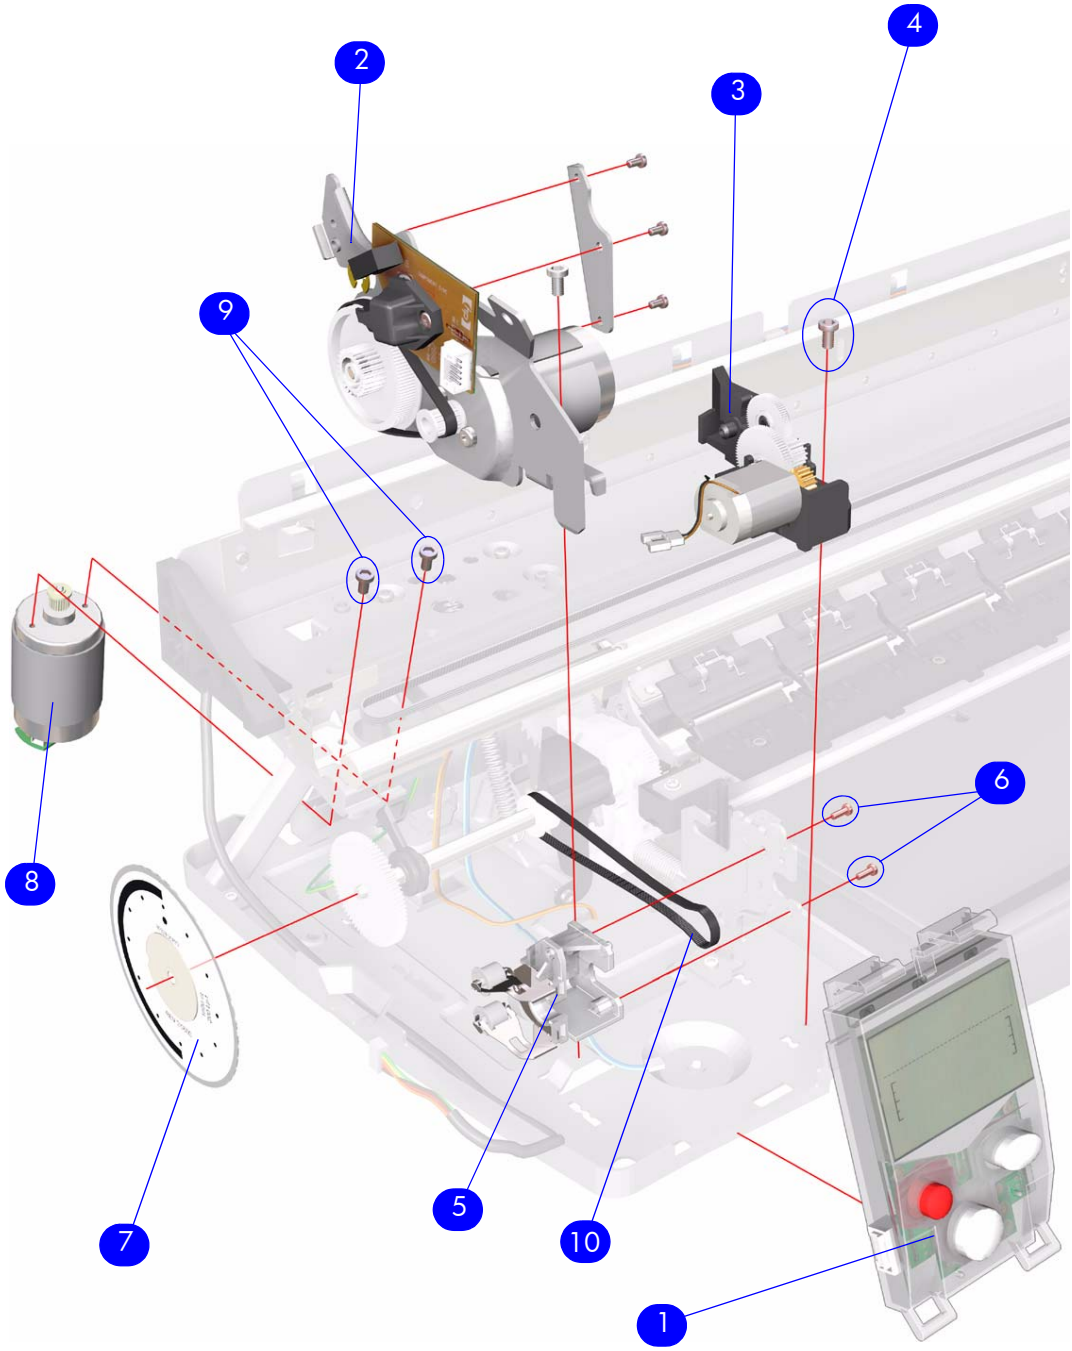

Figure 4: Left Hand Assemblies

Scan-Axis Assemblies

Scan-Axis Assemblies			
Reference on Drawing	**HP Part Number**	**Quantity**	**Description/Comments**
1	Q6656-60070	1	Carriage Assembly
2	Q6656-60071	1	Tubes Assembly
3	0515-2675	3	Screw
4	Q6655-60064	1	Encoder Strip
5	C7790-60104	1	Encoder Strip Holder
6	0515-2812	1	Screw
7	C7790-60124	1	Tube Holder
8	C7790-60125	1	Belt Tension Spring
9	C7791-60212	1	Turnaround Assembly (Includes Belt Tension Spring)
10	Q6655-60069	1	Carriage Belt

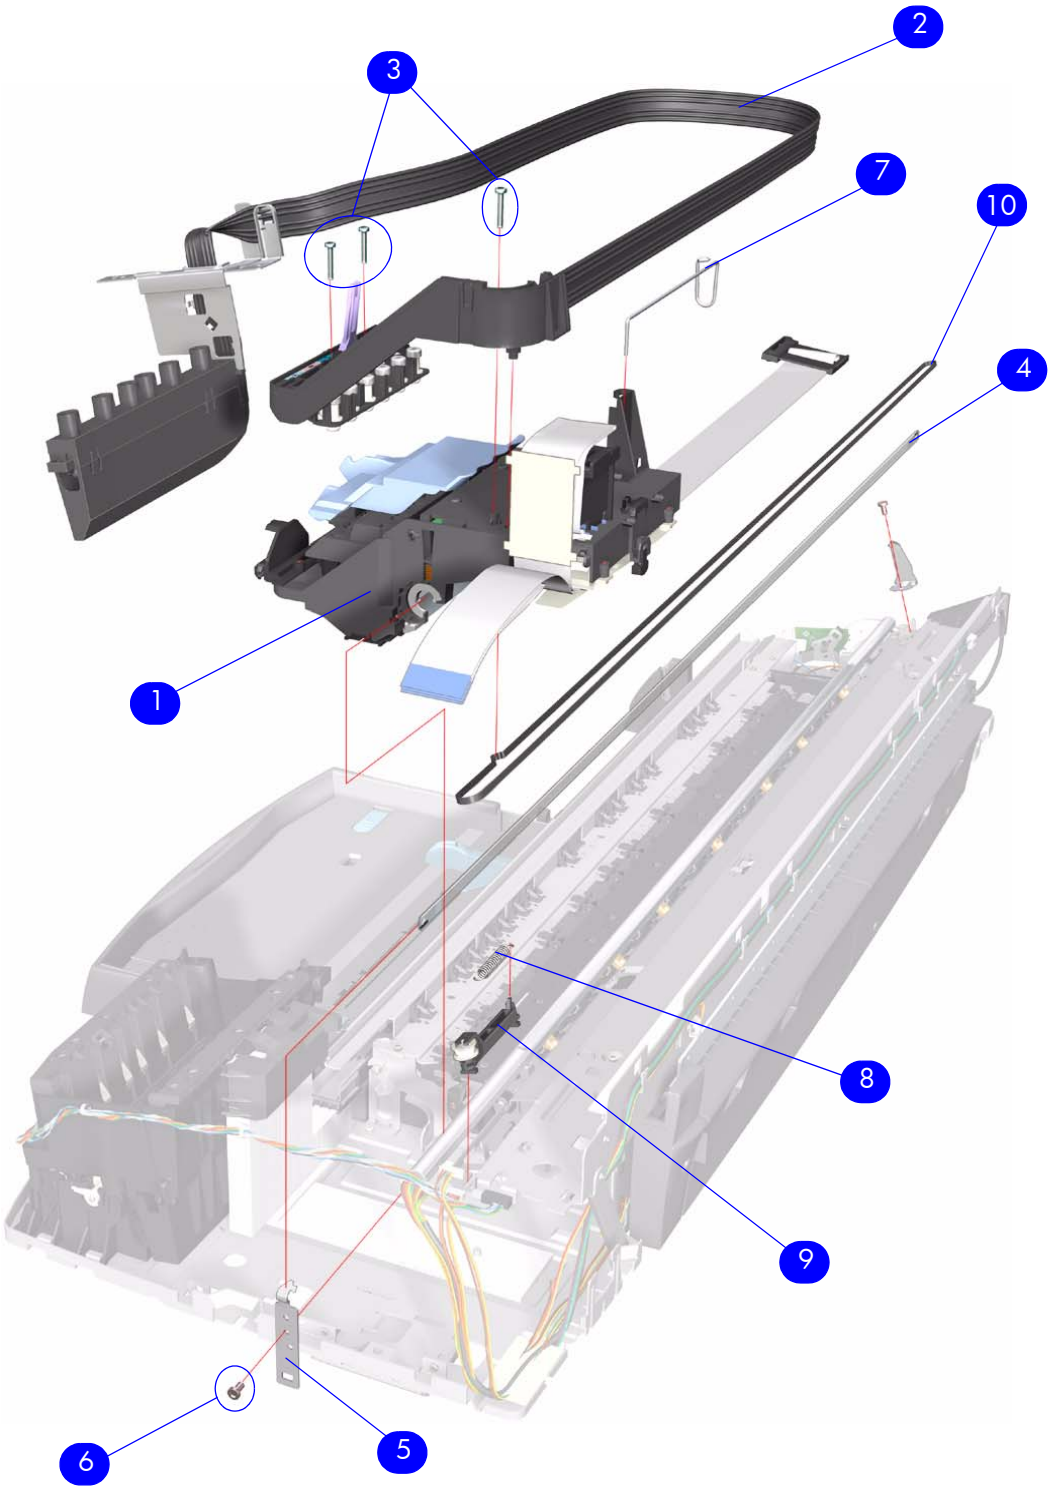

Figure 5: Scan-Axis Assemblies

Top Paper Path Assemblies

Top Paper Path Assemblies			
Reference on Drawing	**HP Part Number**	**Quantity**	**Description/Comments**
1	C7791-60229	1	OOPS Sensor Kit
2	Q6655-60062	1	Feed Roller Assembly (Includes Encoder Disc and Paper-Axis Motor Assembly)
3	Q6655-60082	1	Starwheel Assembly
4	0515-2812	3	Screw
5	Q6655-60060	1	Print Platen
6	Q6655-60074	1	Bypass Platen Kit
7	Q6655-60080	1	Pivot Assembly
8	0515-2555	2	Screw
9	C7791-60232	1	Pick Cam
-	Q6655-60087	1	Miscellaneous Plastic Parts (includes Plift Block, Pin Caber, Pick Cam, FDRLR Idler Gear)
10	Q6655-60088	1	Bypass Platen Actuator and Spring

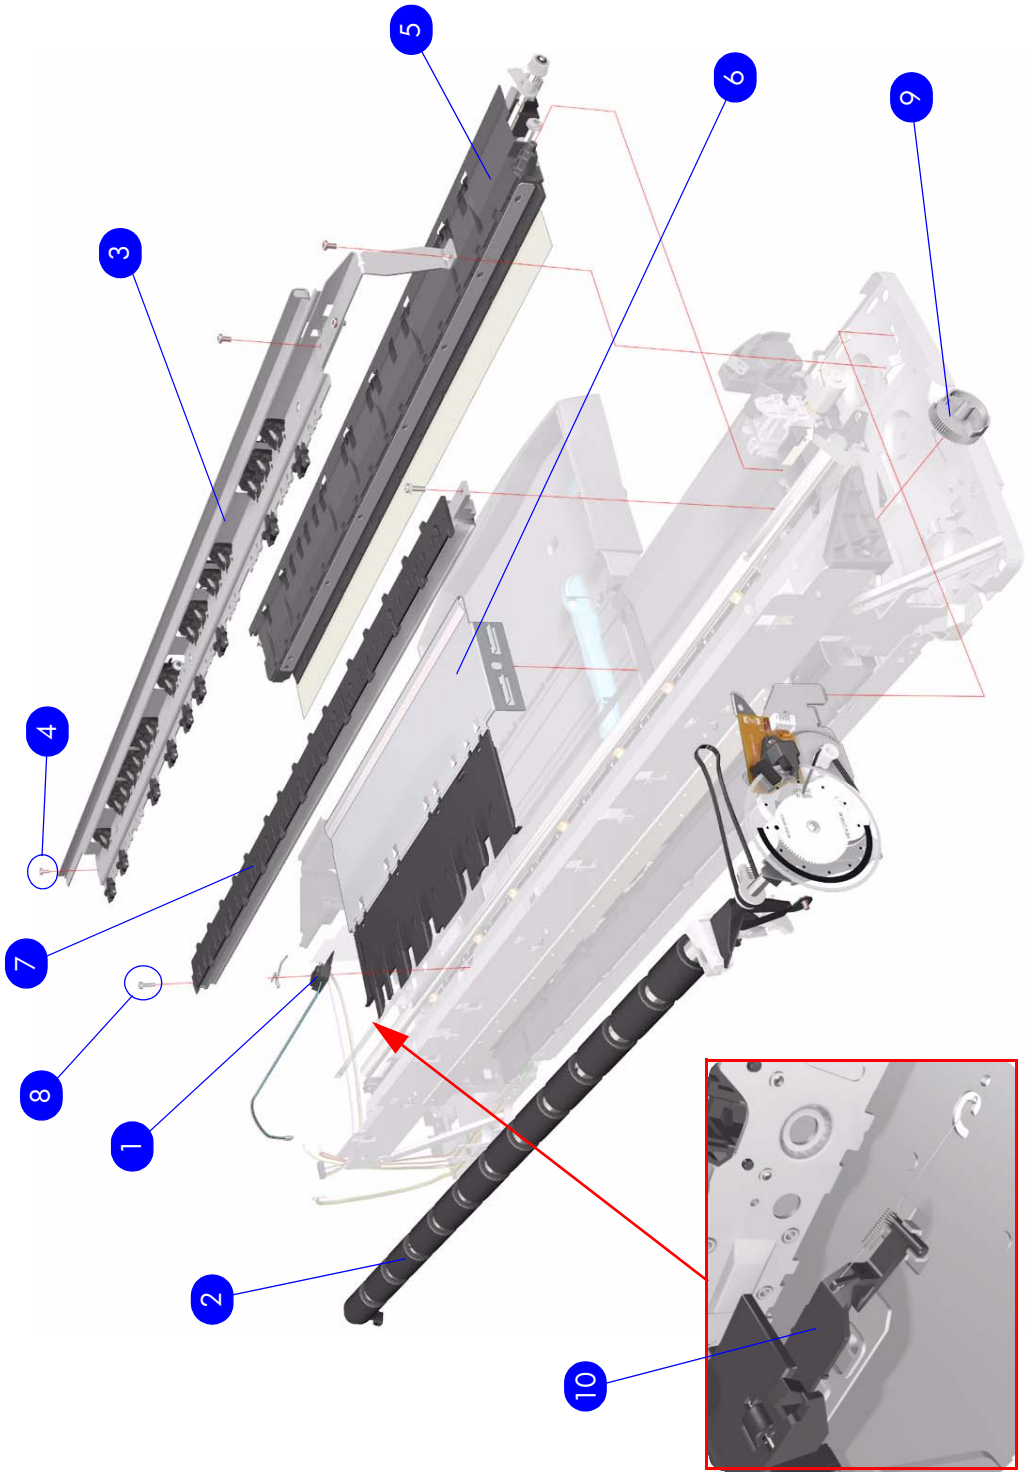

Figure 6: Top Paper Path Assemblies

Rear Paper Path Assemblies

Rear Paper Path Assemblies			
Reference on Drawing	**HP Part Number**	**Quantity**	**Description/Comments**
1	Q6655-60063	1	Inner Paper Guide
2	Q6655-60061	1	Pick Roller Assembly
3	C7791-60230	1	Upper Roller Kit
4	C7791-60235	1	Lower Paper Guide Bits

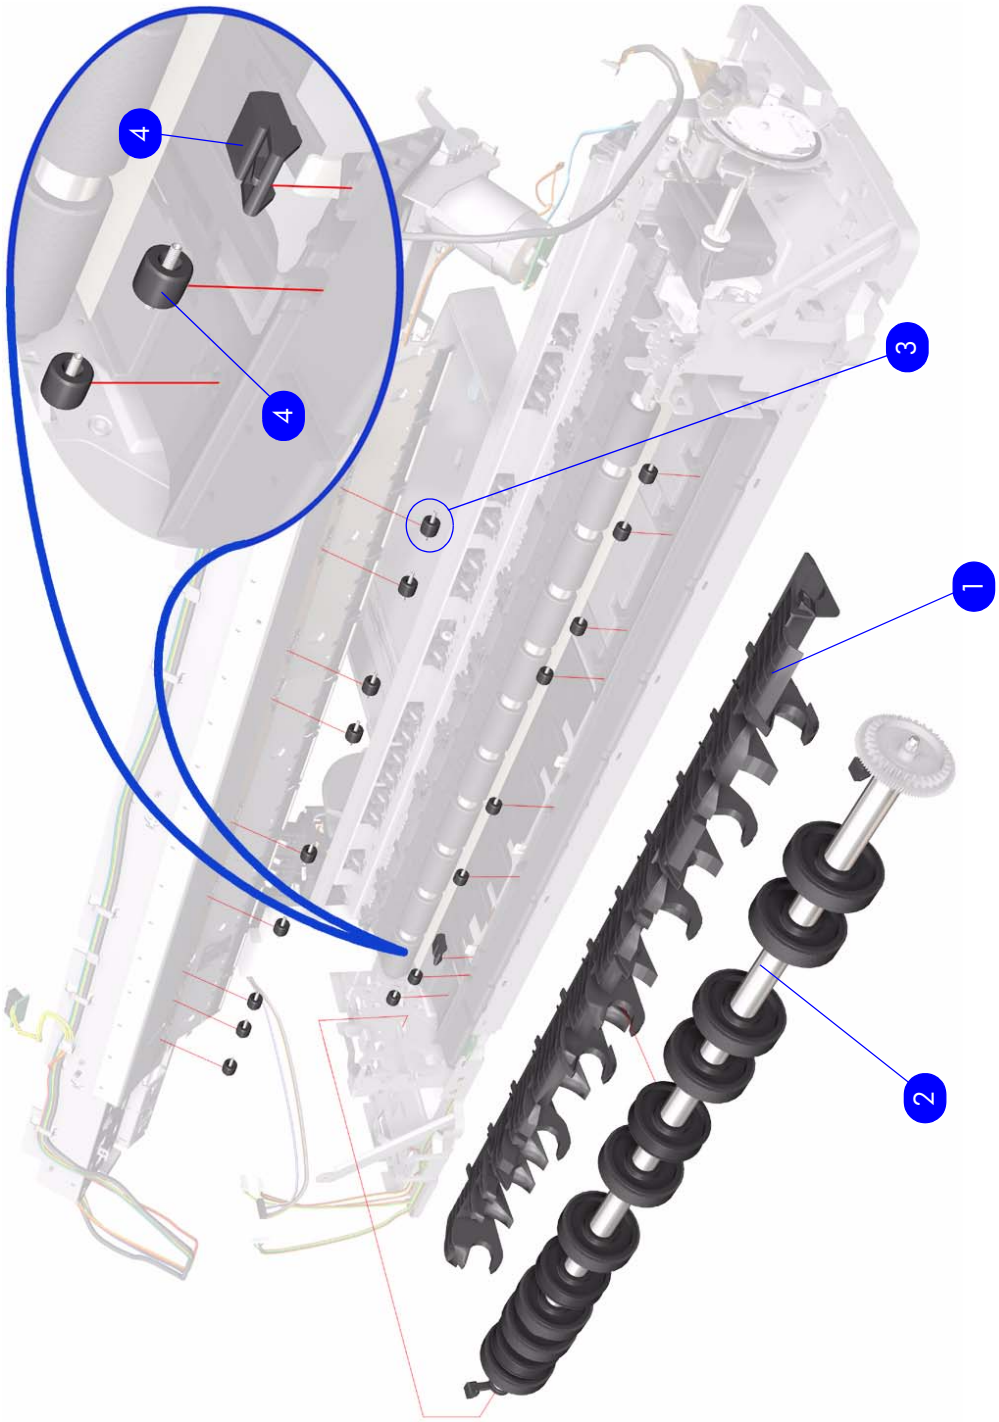

Figure 7: Rear Paper Path Assemblies

Paper Feed Assemblies

Paper Feed Assemblies			
Reference on Drawing	**HP Part Number**	**Quantity**	**Description/Comments**
1	Q1292-60097	1	Input Tray Assembly
2	Q6656-60072	1	Output Tray Assembly
3	C8108-67050	3	Drawer and Spring Cam
4	Q6655-60059	1	Cleanout Assembly
5	C7791-60297	1	Input Tray Cover

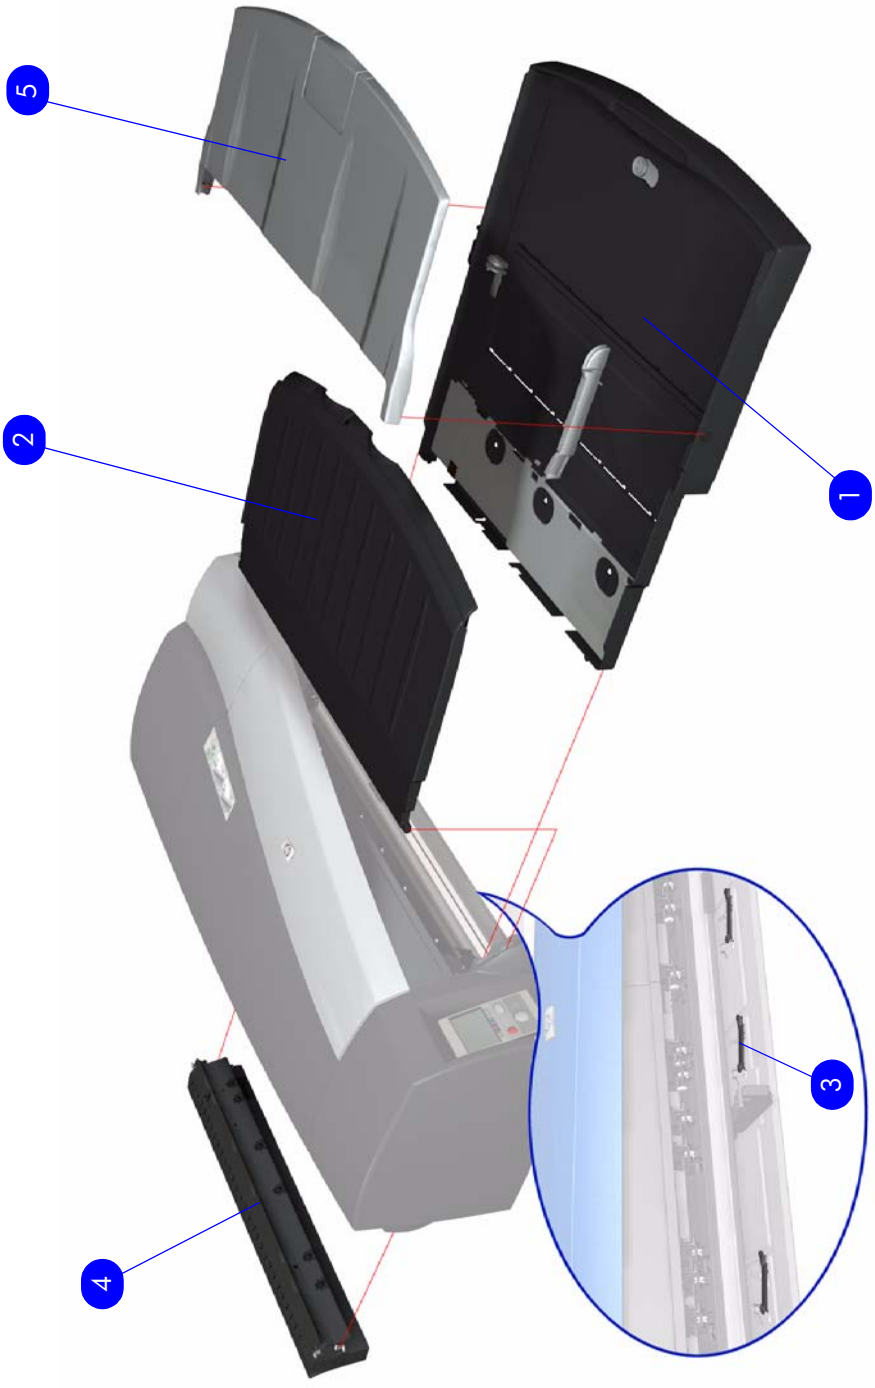

Figure 8: Paper Feed Assemblies)

Cable Harnesses

Cable Harnesses			
Reference on Drawing	**HP Part Number**	**Quantity**	**Description/Comments**
1	Q6655-60067	1	Encoder Harness
2	Q6655-60066	1	Motor Harness
3	Q6655-60054	1	Front Panel cable
4	Q6655-60068	1	Dup-OOPS Harness

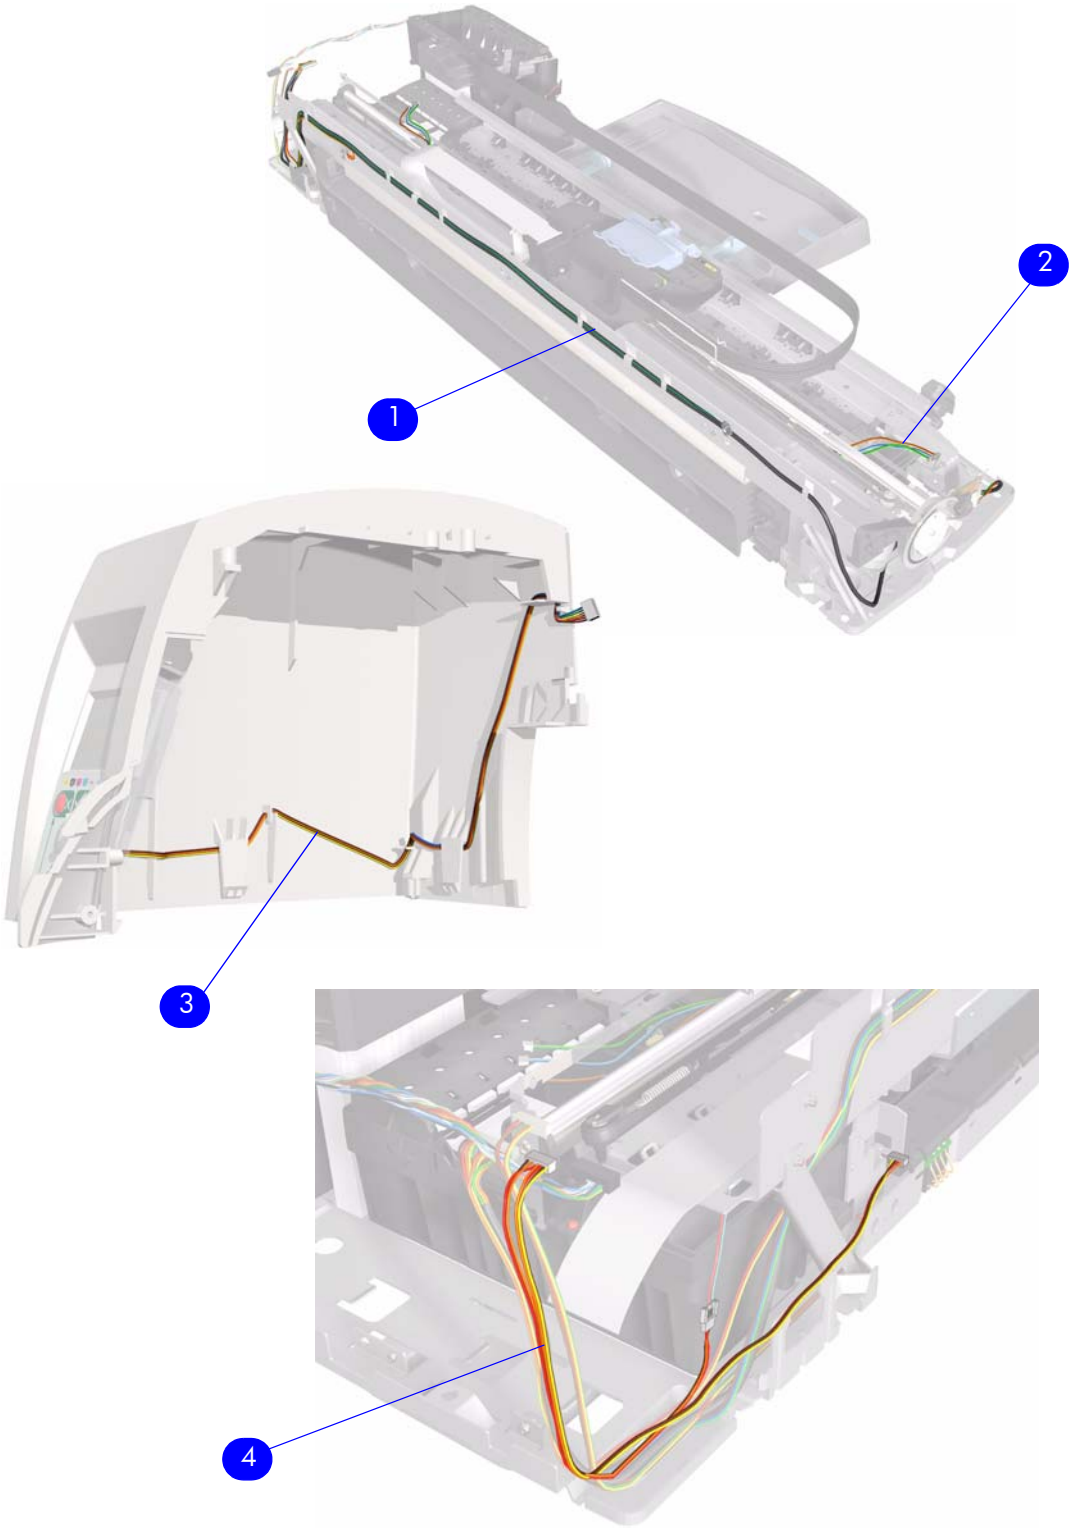

Figure 9: Cable Harnesses

Ink Supplies & Accessories

Ink Supplies and Accessories			
Reference on Drawing	**HP Part Number**	**Quantity**	**Description/Comments**
1	J6057-61001	1	Network Card (New)
	J6057-69001	1	Network Card (Exchange)
2	C5019-80008	1	Black Printhead
	C9420-88001	1	Cyan Printhead
	C9421-88001	1	Magenta Printhead
	C9422-88001	1	Yellow Printhead
	C9423-88001	1	Light Cyan Printhead
	C9424-88001	1	Light Magenta Printhead
3	C5016-80014	1	Black Ink Cartridge
	C9425-88001	1	Cyan Ink Cartridge
	C9426-88001	1	Magenta Ink Cartridge
	C9427-88001	1	Yellow Ink Cartridge
	C9428-88001	1	Light Cyan Ink Cartridge
	C9429-88001	1	Light Magenta Ink Cartridge
4	C7790-60217	1	Electronics End Cap
-	C7790-60425	1	USB Cable (5m)

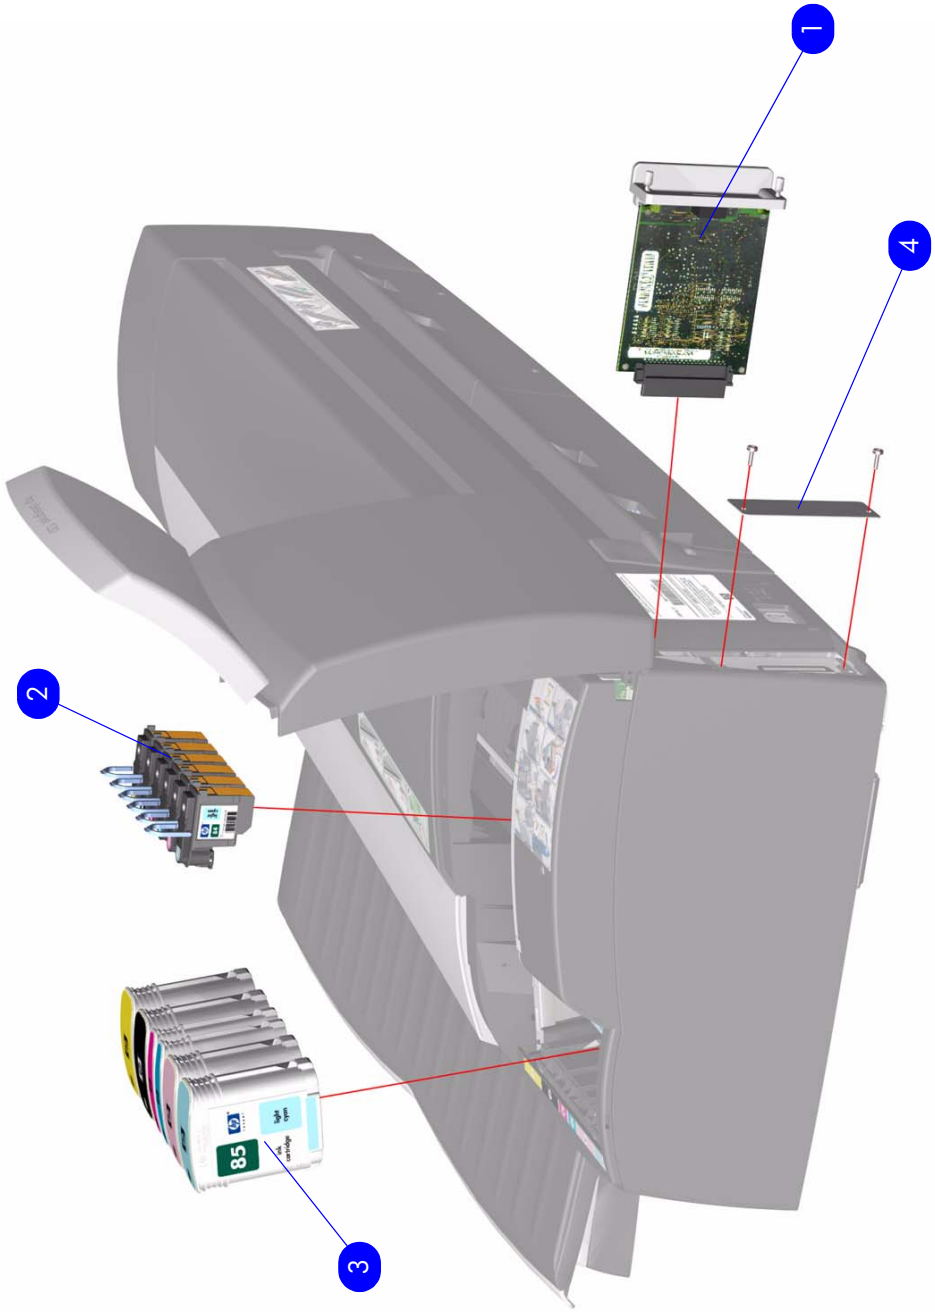

Figure 10: Ink Supplies & Accessories

Rollfeed Components

Rollfeed Components			
Reference on Drawing	**HP Part Number**	**Quantity**	**Description/Comments**
1	Q7791-60215	1	Rollfeed Bracket Kit
2	Q1292-60064	1	Cutter
3	Q6655-60081	1	Spindle

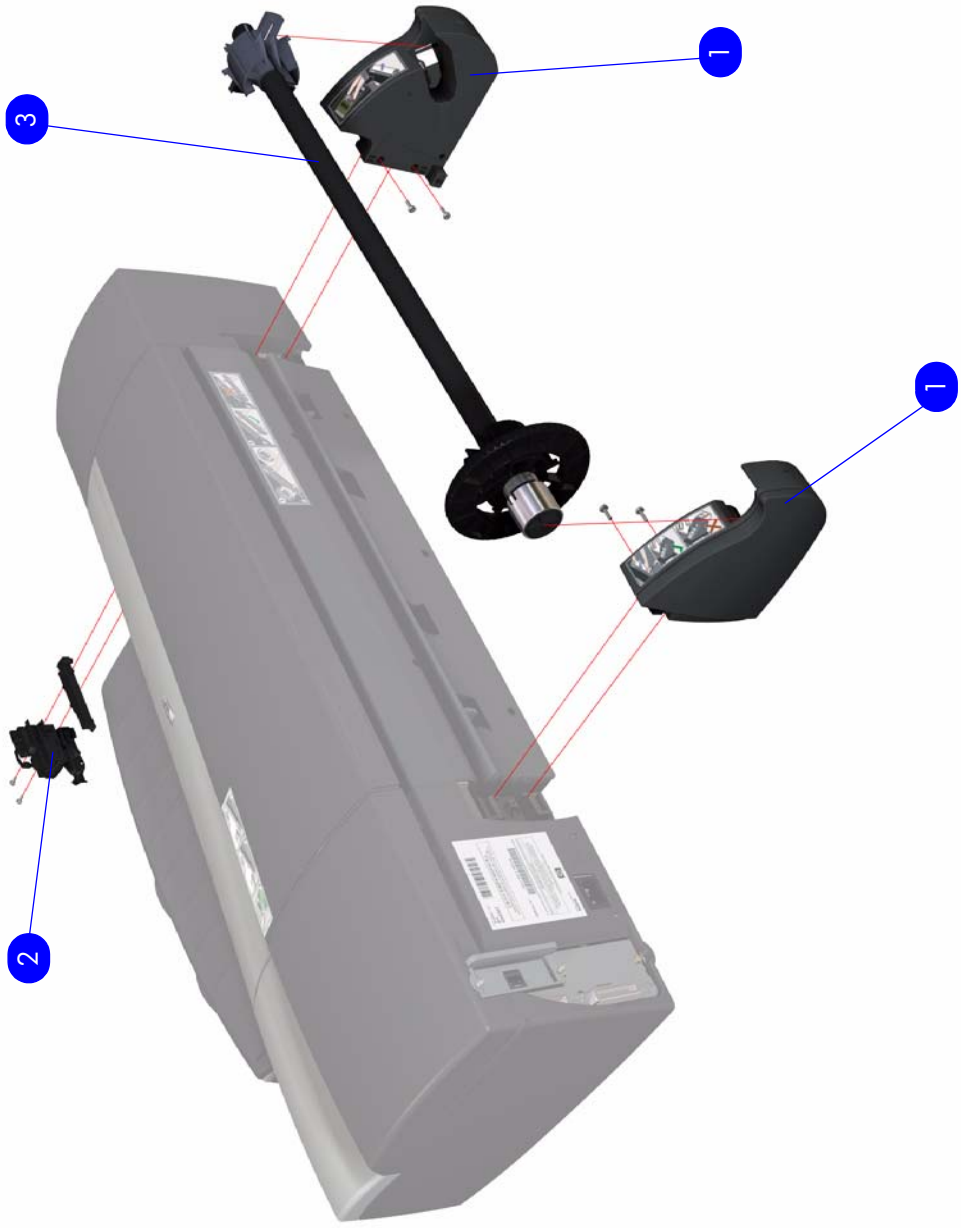

Figure 11: Rollfeed Components